




# CONFIGURATION AND KIT LIST

## ARCS II

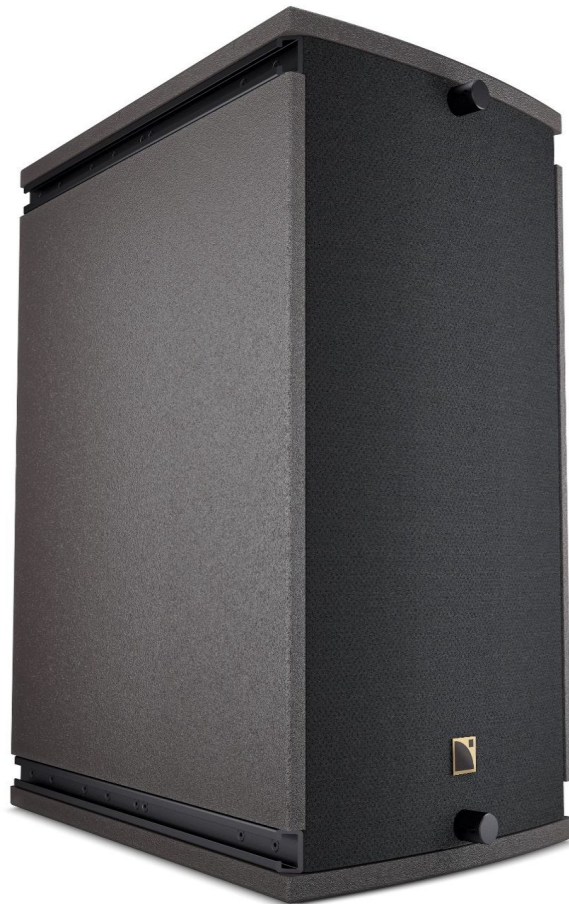

## ARCS II-KS28 (LA12X)

Date :

05/2018

### ARCS II KIT LIST

### CONFIGURATION

ARCS II/SUB SYSTEM	DESCRIPTION	6 ARCS II FILL
LA12X	Amplified controller 4 x 2600W/4 ohms	2
ARCS II	2-way active Constant Curvature WST® enclosure (with 2 coupling bars)	6
ARCPLA	Removable front dolly on wheels for ARCS®/ARCS® II	6
ARCS IICOV	Protective cover for ARCS®/ARCS® II	6
DO3WFILL	Speaker cable breakout CA-COM > 2 NL-2 + 1 NL4 3m length	2
SP.7	Speaker cable: 4 x 4mm <sup>2</sup> NL4 0.7m length	4
BUMP3	Rigging element to rig ARCS/ARCS II horizontally	2
<b>KS28 SYSTEM</b>		
KS28	Flyable subwoofer 2 x 18"	4
KS28-PLA	Removable front dolly on wheels for 1 x KS28	4
KS28-COV	Protective cover for 1 x KS28	4
<b>SERVICE STARTER KIT ARCS</b>		
KR HSBC34	KitDiaphragm for HP BC34II (3" driver - 8 ohms)	1
KR HPBC34II	Kit HP BC34II (equipped 3" driver - 8 ohms)	1
KR HPPH154	Kit HP PH154 Speaker 15" - 8 ohms	1
KR EL60	Kit 10 keeper rings 6mm with sling for dollies	1
<b>SERVICE STARTER KIT KS28</b>		
G03229	KR speaker KS28	1

### 6 ARCS II FILL

