

PRELIMINARY

A15i FOCUS MEDIUM THROW LINE SOURCE



Part of the A Series, A15i Focus is the installation version of the A15 Focus, designed for medium throw installation applications. A15i Focus shares identical sonic performance and deployment flexibility with its touring counterpart but features simplified mounting hardware for greater visual discretion.

With a tightly-controlled 10° enclosure coverage, A15i Focus boasts an impressive output of 144 dB and ensures projection up to 45 m. Panflex allows users to adapt directivity to the audience geometry and ensure exceptional frequency response stability.

Combinations of A15i Focus and A15i Wide can be flown or stacked to form a vertical line source. A15i Focus can also be used individually as a configurable directivity point source for front fill or delay applications where high SPL and narrow coverage are required.


A15i Focus provides the low frequency contour of a large concert system and KS21i subwoofer further reinforces the contour and extends bandwidth to 29 Hz.

A15i Focus is a discrete and versatile solution that delivers concert level performance for a wide range of installed applications such as theaters, houses of worship, clubs, educational facilities and sport venues.




SPECIFICATIONS


Description	2-way passive constant curvature WST 10°, amplified by LA4X / LA8 / LA12X
Usable bandwidth (-10 dB)	41 Hz - 20 kHz ([A15])
Maximum SPL¹	144 dB ([A15])
Nominal directivity	Enclosure: 10° Panflex: 70° / 110° symmetric or 90° asymmetric
Transducers	LF: 1 x 15" neodymium cone driver HF: 1 x 3" diaphragm neodymium compression driver
Acoustical load	LF: Bass-reflex, L-Vents HF: DOSC waveguide, Panflex
Nominal impedance	8 Ω
Connectors	4-point terminal block with push-in connection Connector sealing plate with cable gland
Rigging and handling	High grade steel plates four-point rigging system 3 M8 inserts on side panels for A15i yoke bracket 4 M6 inserts on the rear panel for rigging accessories
Safety	1 DIN580-compatible M8 insert
Weight (net)	35 kg / 77 lb
Cabinet	Premium grade Baltic beech and birch plywood
Front	Coated steel grill Acoustically neutral 3D fabric
Rigging components	High grade steel with anti-corrosion coating
Finish	Dark grey brown Pantone 426 C Pure white RAL 9010 Custom RAL code on special order
IP	IP55



Front



Side

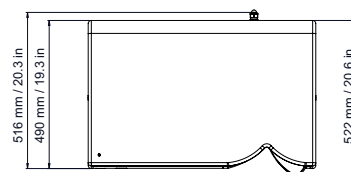

Top

¹ - Peak level at 1 m under free field conditions using pink noise with crest factor 4 (preset specified in brackets).

PRELIMINARY

A15i WIDE A SERIES LOUDSPEAKER



Part of the A Series, A15i Wide is the installation version of the A15 Wide, designed for medium throw installation applications. A15i Wide shares identical sonic performance and deployment flexibility with its touring counterpart but features simplified mounting hardware for greater visual discretion.

The 30° enclosure of A15i Wide enables a compact array to provide expansive coverage while preserving sightlines. Panflex allows users to adapt directivity to the audience geometry and ensure exceptional frequency response stability.




Combinations of A15i Wide and A15i Focus can be flown or stacked to form a vertical line source. A15i Wide deploys radially to offer broad horizontal coverage, particularly suited as mains or center cluster. A15i Wide can also be used individually as a configurable directivity point source for pole-mounted main systems or delays.

A15i Wide provides the low frequency contour of a large concert system and KS21i subwoofer further reinforces the contour and extends bandwidth to 29 Hz.

A15i Wide is a discrete and versatile solution that delivers concert level performance for a wide range of installed applications such as theaters, houses of worship, clubs, educational facilities and sport venues.

SPECIFICATIONS

Description	2-way passive constant curvature WST 30°, amplified by LA4X / LA8 / LA12X
Usable bandwidth (-10 dB)	42 Hz - 20 kHz ([A15])
Maximum SPL¹	141 dB ([A15])
Nominal directivity	Enclosure: 30° Panflex: 70° / 110° symmetric or 90° asymmetric
Transducers	LF: 1 × 15" neodymium cone driver HF: 1 × 3" diaphragm neodymium compression driver
Acoustical load	LF: Bass-reflex, L-Vents HF: DOSC waveguide, Panflex
Nominal impedance	8 Ω
Connectors	4-point terminal block with push-in connection Connector sealing plate with cable gland
Rigging and handling	High grade steel plates four-point rigging system 3 M8 inserts on side panels for A15i yoke bracket 4 M6 inserts on the rear panel for rigging accessories
Safety	1 DIN580-compatible M8 insert
Weight (net)	33 kg / 73 lb
Cabinet	Premium grade Baltic beech and birch plywood
Front	Coated steel grill Acoustically neutral 3D fabric
Rigging components	High grade steel with anti-corrosion coating
Finish	Dark grey brown Pantone 426C Pure white RAL 9010 Custom RAL code on special order
IP	IP55

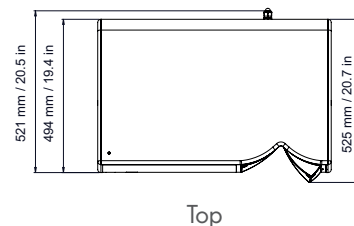

¹. Peak level at 1 m under free field conditions using pink noise with crest factor 4 (preset specified in brackets).